

Recommended steps to understand the HVTV Flip-Around TV Mount


Anyone involved should take the time to view the following info and contact tech support with any questions 208-287-8882 x 2

These drawings are guidelines specific to the "Built-in" Flip-Around, where the Flip-Around mechanism is recessed into a wall.

Helpful Resources:

- Watch videos of **example built-in projects**. Link to YouTube playlist: <https://bit.ly/fabipl>
- Watch Installation Overview VIDEO - <https://bit.ly/fainstalloverview> (Note: This video is meant to prime you with a basic understanding of the installation process. Refer to your model's instructions book and these construction drawings for specific details & dimensions)
- Review the following drawings and notes
- QUESTIONS? Please contact us freely! We can surely help. If needed, we are happy to video chat to answer questions efficiently and thoroughly. Contact Mark with Hidden Vision 208-287-8882 x2.

	CONTACT Mark Joseph Design LLC / Hidden Vision TV Mounts	DRAWING NAME:		Drawing #:
	Mark Beshara 208-919-5969	FILE NAME:		Page 1
		M3-65-8.3_DRAWINGS FOR RECESSED APPLICATION		SCALE: 1:16 DO NOT SCALE DRAWING Date: 6/1/2023

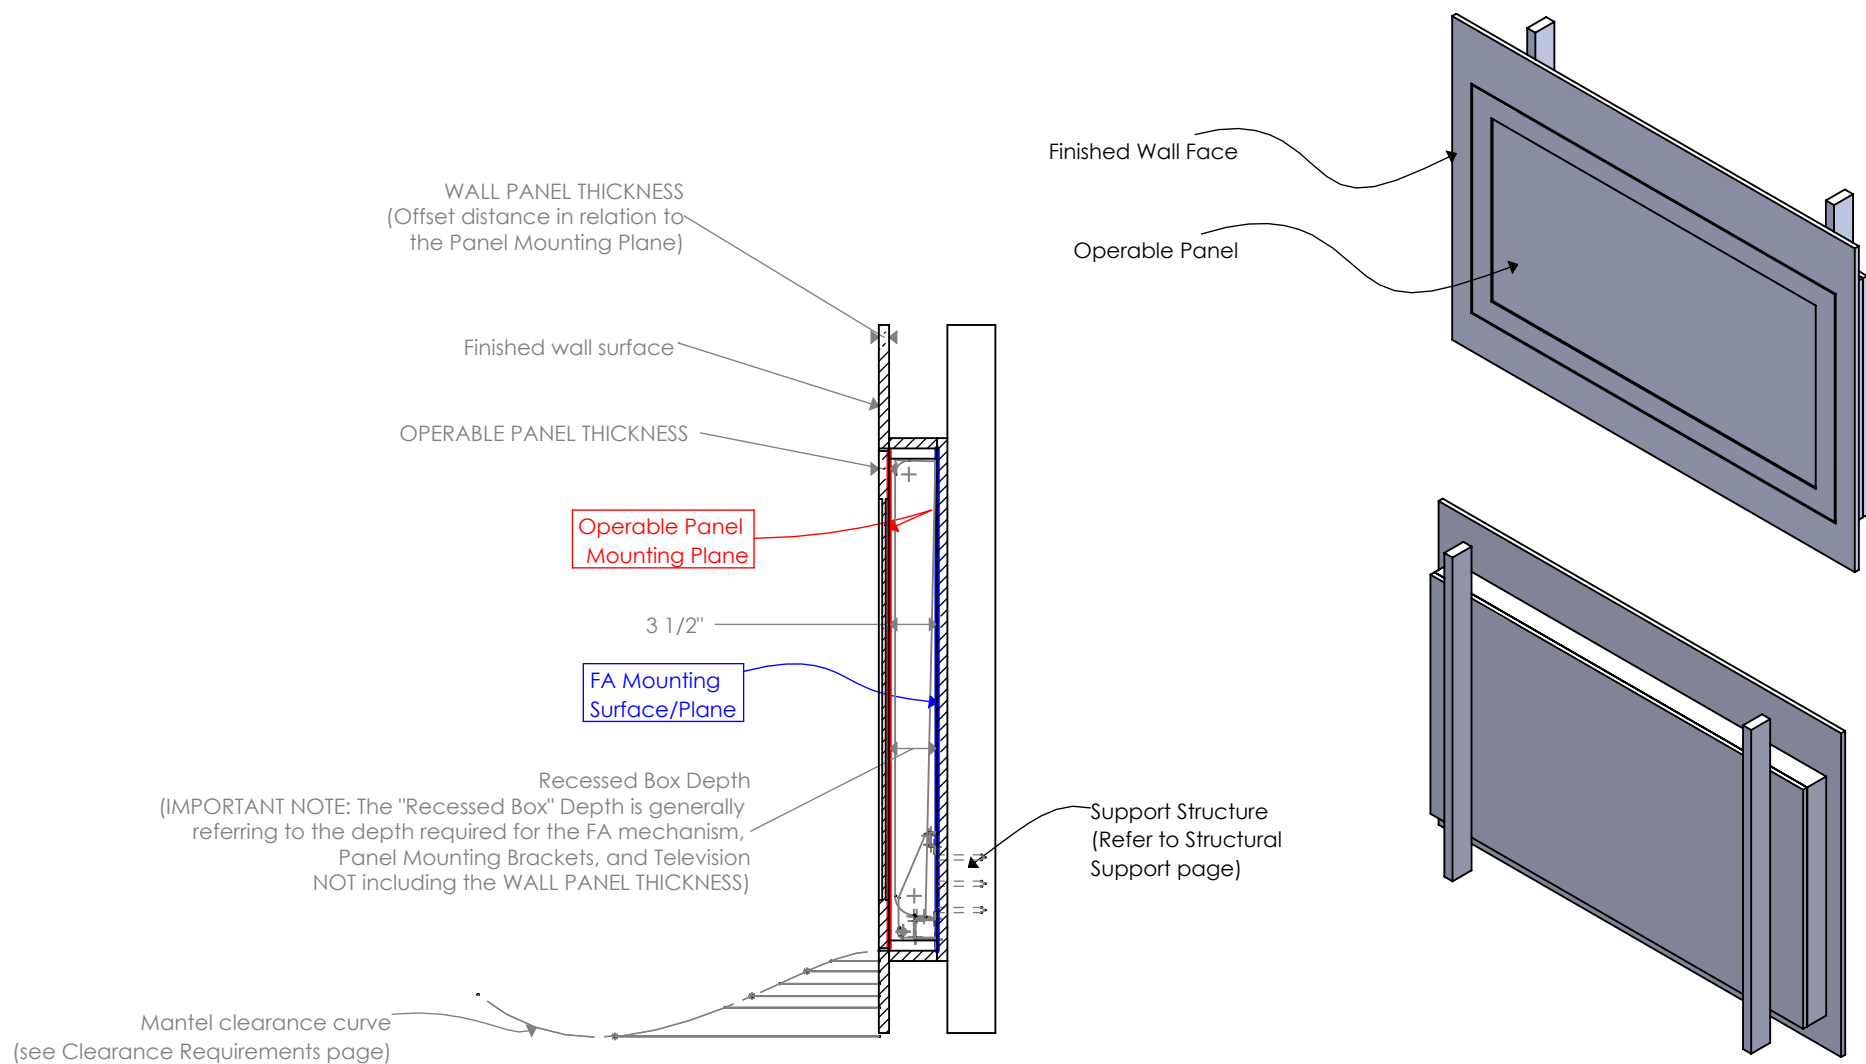

CONTACT
Mark Joseph Design LLC / Hidden
Vision TV Mounts
Mark Beshara 208-919-5969

DRAWING NAME:
Terminology

FILE NAME:
M3-65-8.3_DRAWINGS FOR RECESSED APPLICATION


Drawing #:

- Page 2

SCALE: 1:16 DO NOT SCALE DRAWING Date: 6/1/2023

Size of recess & placement of Flip-Around mechanism within the Recessed Box

<PARA >Increasing the recessed box height for a sound bar or other reason? Consider the following: Regardless of the recessed box height, the FA mechanism must be placed in relation to the TOP of the recessed box.

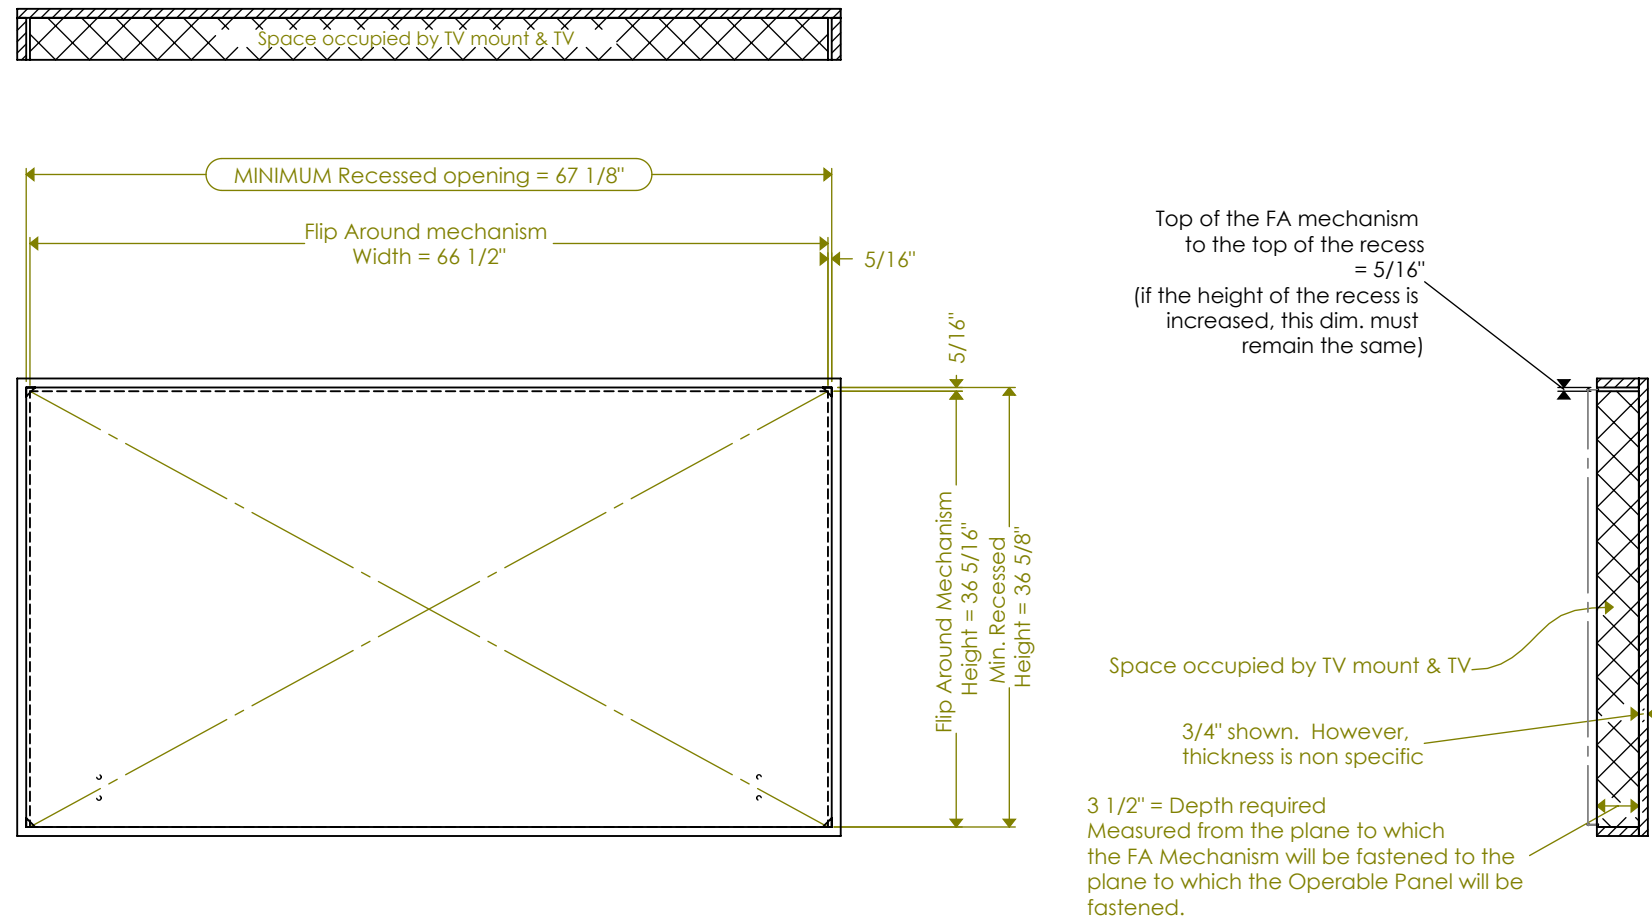

CONTACT
Mark Joseph Design LLC / Hidden
Vision TV Mounts
Mark Beshara 208-919-5969

DRAWING NAME:
Box Size & Flip Around Mech. Placement
FILE NAME:
M3-65-8.3_DRAWINGS FOR RECESSED APPLICATION

Drawing #:
- Page 3
SCALE: 1:16 DO NOT SCALE DRAWING Date: 6/1/2023

Clearance Gap around panel: As the operable panel flips around it will enter the recessed opening as it approaches the TV viewing position. Therefore, the recessed opening must be larger than the operable panel. (see clearance considerations sheet)


How's the gap look? Here are some **examples** for visual references.

- 50" TV, 3/16" gap + 3/4" to the stone, dark Picture Frame contrasted on light stone, - <https://youtu.be/LLVYAPLQkr0?t=1s> [Note: If you're using dark material the gap is almost invisible]
- 65" TV, 1/4" gap, Classic White inset cabinetry - <https://youtu.be/8B6eU2ddoM0>
- 43" TV, 5/16" gap, Classic White inset cabinetry - <https://youtu.be/9d2SzdOw8LQ>
- 55" TV, 3/4" gap, Gray modern panel wall - <https://youtu.be/U4COiLB8Vpc> (Note: The Flip-Around mount shown in this video is an old version (v.4))

(youtube playlist of built-in projects: <https://bit.ly/fabiapl>)

Minimum Gap (Sides): As the operable panel flips around it will exit and re-enter the recessed opening. Therefore, the recessed opening must be larger than the operable panel. (see clearance considerations page) We recommend a minimum 1/8" gap on the sides.

Minimum Gap (Top & Bottom): Maintaining an even gap all the way around looks best. However, if your design requires it, it is possible to have a zero gap at the top and bottom as long as the panel is beveled so it cannot bind on the top or bottom. Talk to us for more details on this.

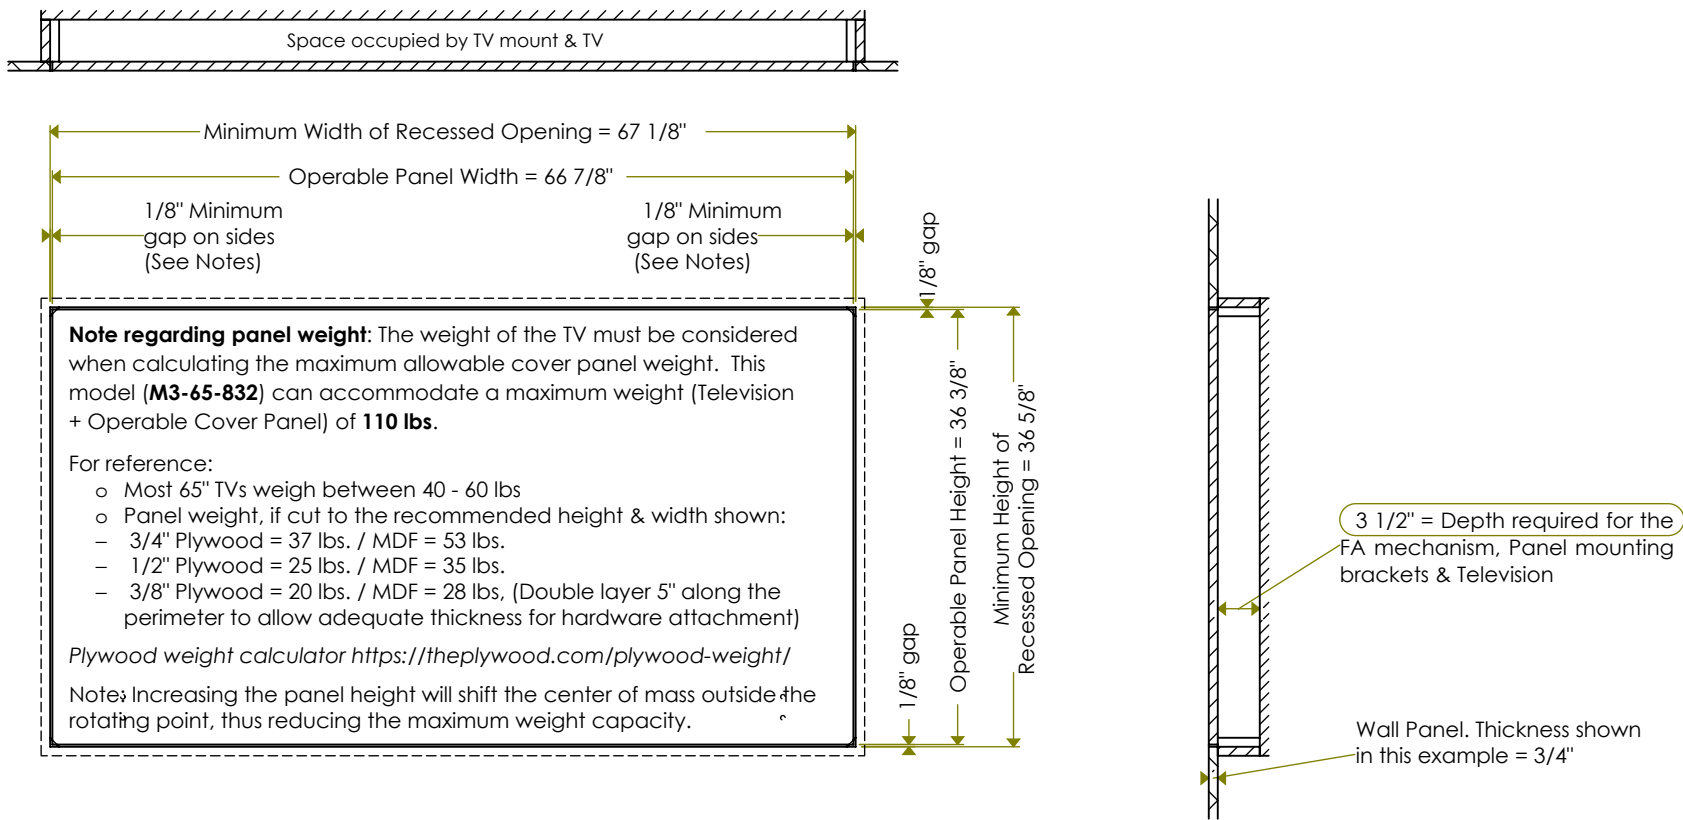

	CONTACT Mark Joseph Design LLC / Hidden Vision TV Mounts Mark Beshara 208-919-5969	DRAWING NAME: PANEL & RECESS SIZE	Drawing #: - Page 4
		FILE NAME: M3-65-8.3_DRAWINGS FOR RECESSED APPLICATION	
		SCALE: 1:16	DO NOT SCALE DRAWING Date: 6/1/2023


Note: These drawings are offered as a courtesy to be used as a guide. Please speak with Hidden Vision to go over any changes you'd like to make to this basic design.

Panel Weight: Refer to previous page.


Panel Width & Height: The panel width and height shown are the minimum recommended. The **panel width** can be increased with little consequence (assuming you also increase the width of the recessed opening). The **panel height** can be increased however keep in mind that 1" increase in panel height = 2" increase in total vertical clearance required (see Clearance Considerations)

Panel Thickness: You can use a panel thicker than 3/4". If you do, it's a good idea to talk with Mark. There are adjustment screws that allow for on site adjustment to accommodate panels of varying thickness. Talk to Mark for more details on this.

Attaching Panel to TV Mount: DO NOT permanently fasten the panel to the TV mount using screws or adhesive. Use the supplied PANEL MOUNTING HARDWARE designed to allow removal of the panel if ever required in the hidden position.

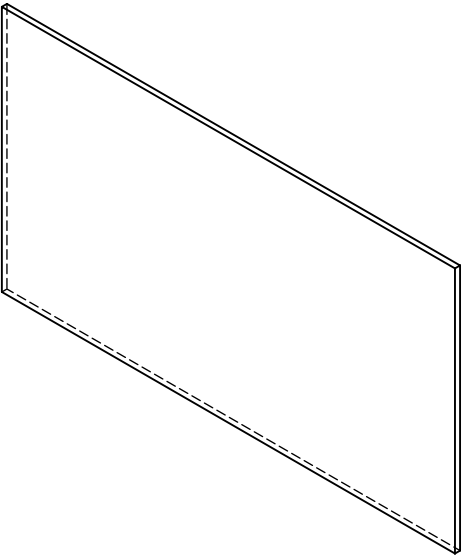


3/4" Shown in this example.
(The maximum operable
panel thickness = the total
recess opening depth -
6.5",but should not exceed
2.25" with some exceptions.
Contact us for more info.)

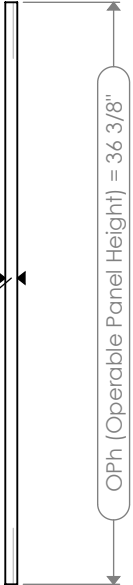

	CONTACT Mark Joseph Design LLC / Hidden Vision TV Mounts	DRAWING NAME: OPERABLE PANEL	Drawing #: - Page 5
	Mark Beshara 208-919-5969	FILE NAME: M3-65-8.3_DRAWINGS FOR RECESSED APPLICATION	
			SCALE: 1:12 DO NOT SCALE DRAWING Date: 6/1/2023


Clearance considerations:

- If you are considering increasing the panel height you need to increase the overall clearance required by 2x. Since the Operable Panel flips around, adding 1" of height to your panel will result in 2" additional vertical clearance required.
- Panel thickness is negotiable, and clearance is adjustable on site. However, in general, it's best to talk with us if the the total thickness of the **Operable Panel** + the **Wall Panel** will exceed 3".

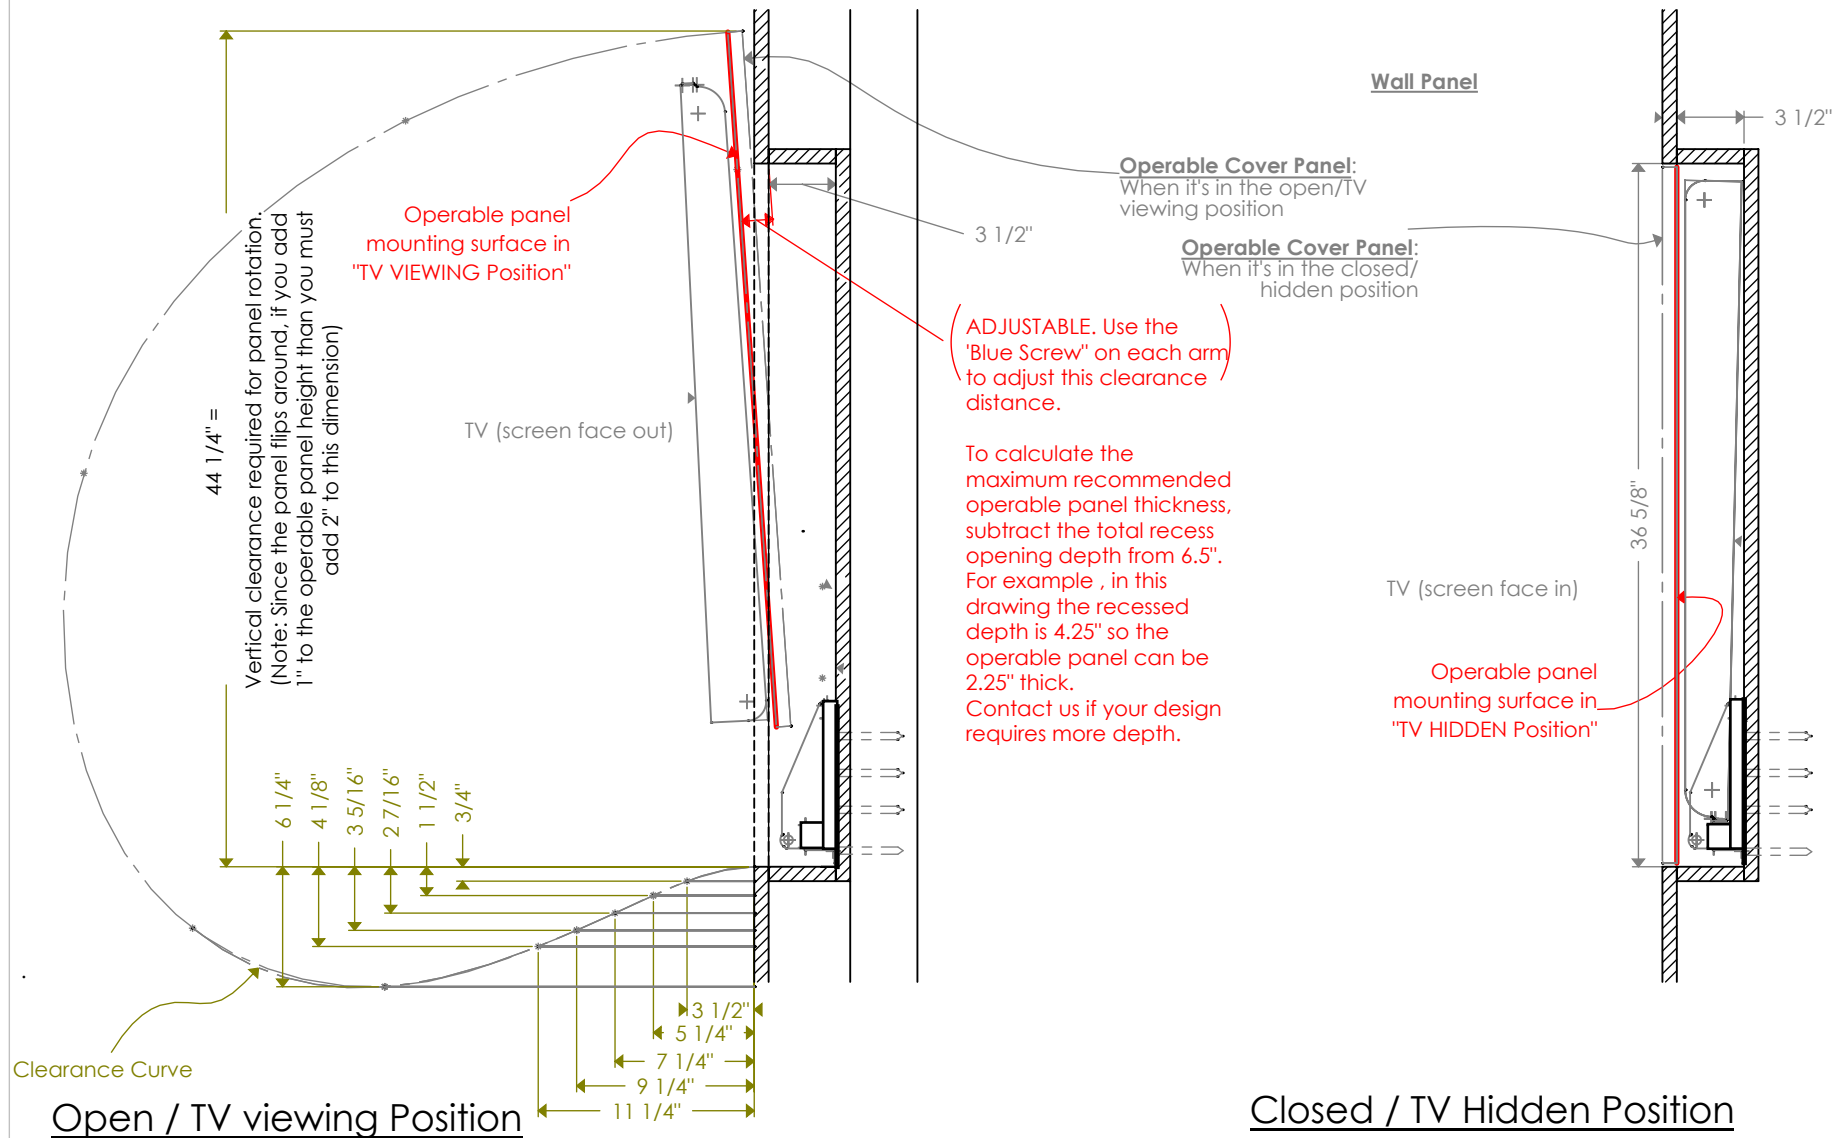

	<p>CONTACT Mark Joseph Design LLC / Hidden Vision TV Mounts</p> <p>Mark Beshara 208-919-5969</p>	<p>DRAWING NAME: Clearance Considerations</p> <p>FILE NAME: M3-65-8.3_DRAWINGS FOR RECESSED APPLICATION</p>	<p>Drawing #: - Page 6</p> <p>SCALE: 1:16 DO NOT SCALE DRAWING Date: 6/1/2023</p>
--	--	---	--

M3BI-XX-832 ANGLE & CLEARANCE ADJUSTMENT SCREWS

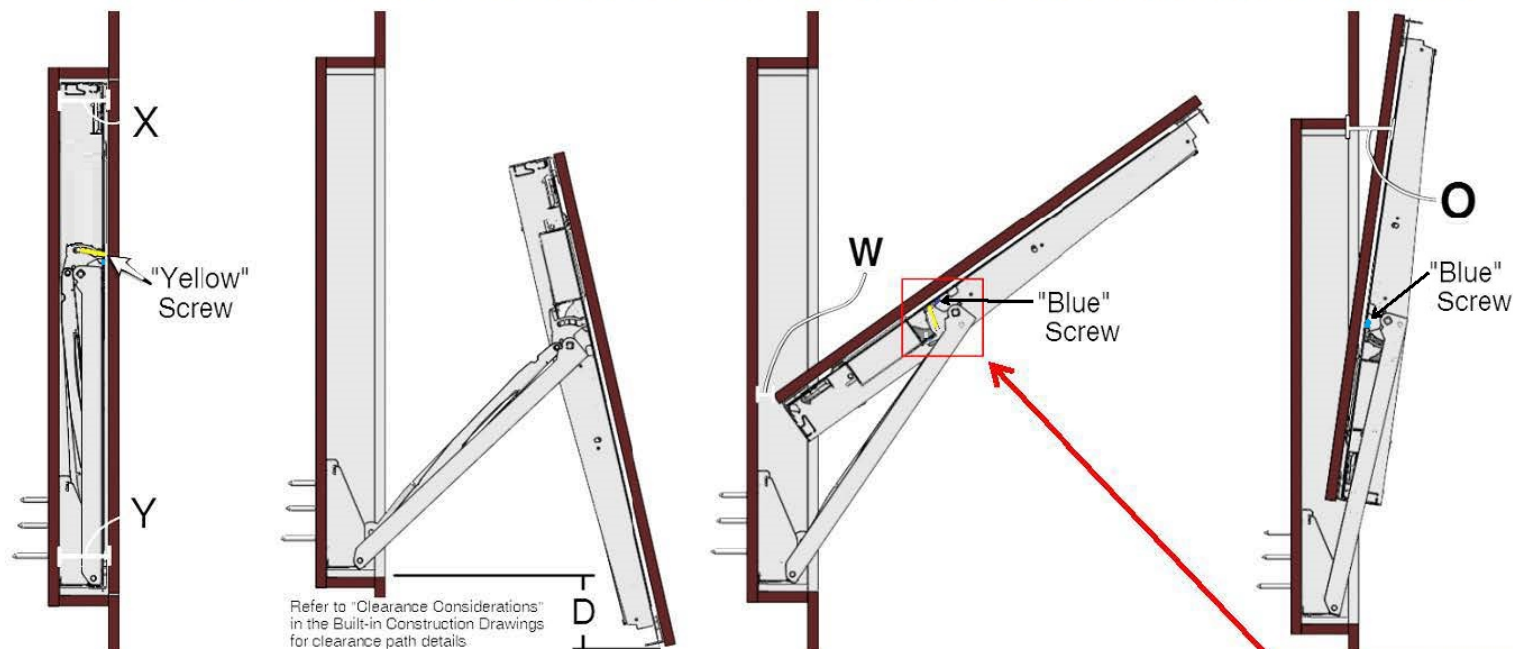


Each arm has two independent adjustment screws. Yellow, adjusts the closed position angle and Blue adjusts the open position angle as well as the clearance. Note: The true results of your adjustment will not be seen until the mount is operated once after the adjustment is made. Feel free to contact us to assist with fine tuning these and other adjustments. We have excellent tech support! Call or text Mark 208-919-5969.

	X	Y	D	W	O
Loosen Yellow Screws (CCW)	+	-	nc	nc	nc
Tighten Yellow Screws (CW)	-	+	nc	nc	nc
Loosen Blue Screws (CCW)	nc	nc	nc	+	+
Tighten Blue Screws (CW)	nc	nc	nc	- *	-

+ = Dimension increases - = Dimension decreases nc = No Change

- * Careful! Tightening the Blue screw too much can result in contact with the wall during rotation.

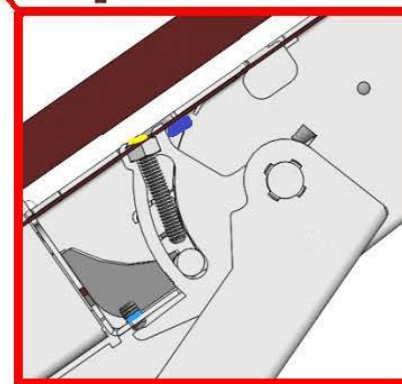

CONTACT
Mark Joseph Design LLC / Hidden
Vision TV Mounts
Mark Beshara 208-919-5969

Angle & Clearance Adjustment screws

M3-65-8.3_DRAWINGS FOR RECESSED APPLICATION

Drawing #:




Page 7

SCALE: 1:1

DO NOT SCALE
DRAWING
Date: 6/1/2023

Structural Support:

- If your situation requires alternative support materials & methods please contact us to discuss.
- Stud Location: The Wall Mount Brackets are adjustable to allow alignment with varied stud location. Refer to the Flip-Around Installation Instructions for the Stud Max and Minimum distance from center.

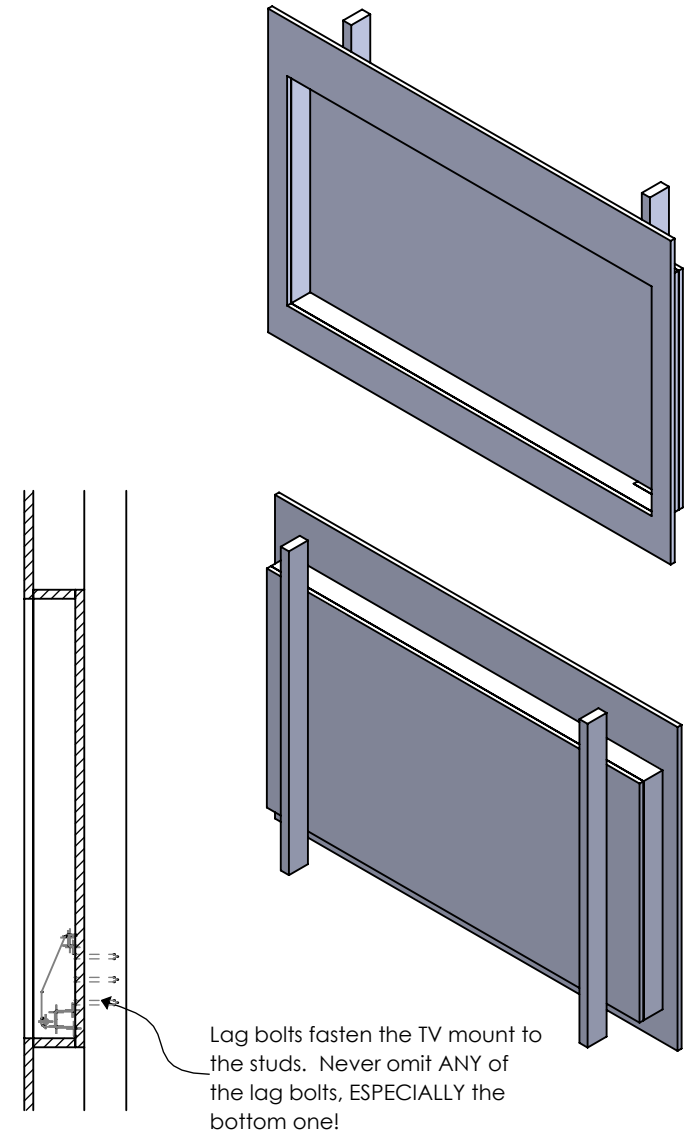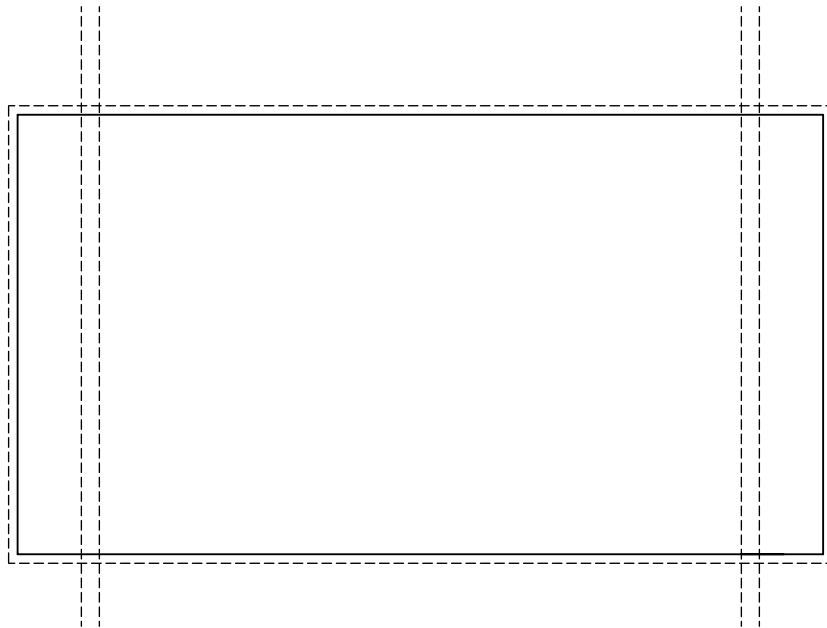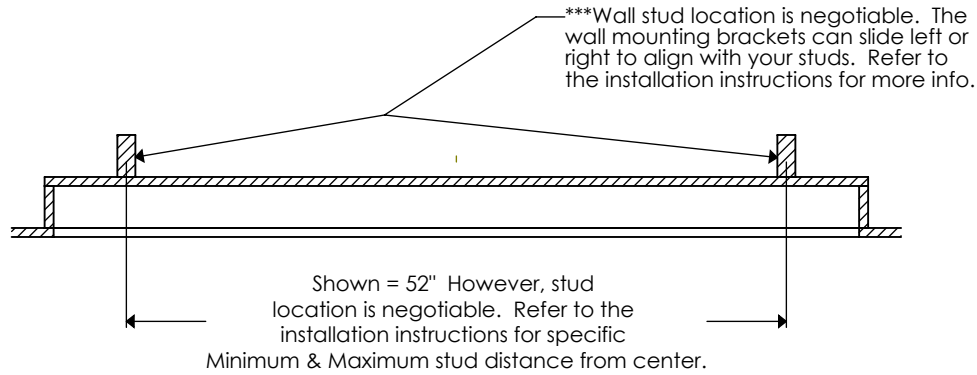

CONTACT
Mark Joseph Design LLC / Hidden
Vision TV Mounts
Mark Beshara 208-919-5969

DRAWING NAME:
WALL STUDS

FILE NAME:
M3-65-8.3_DRAWINGS FOR RECESSED APPLICATION

Drawing #:

Page 8

SCALE: 1:16 DO NOT SCALE DRAWING Date: 6/1/2023

To understand the electrical requirements it is best to start by watching the install video (<https://youtu.be/GM1LVz5AKGg>) then look over the instructions.


Cable Access / Power Requirements

Numerous products and combinations can be used, however, there are specific details that must be observed.

- 1) Within the Yellow outlined area nothing can protrude more than 1/2" from the wall/mounting surface.
- 2) Within the area BELOW the yellow outlined area no objects should protrude more than 3/16".
- 3) Within the area ABOVE the yellow outline no objects should protrude from the wall if avoidable. If not avoidable you can (in most cases) get away with up to 1/4". Please contact us with questions. We can help.

Here are a couple options we've found to work well. Or SINCE YOU'RE CUSTOMIZING A BUILT-IN consider designing a accessible panel close by where the electronics could be stored. Then just run a conduit to that location.

Electrical should be performed by a licensed electrician. It is your responsibility to verify all electrical components and installation methods meet your local building, safety and fire codes.

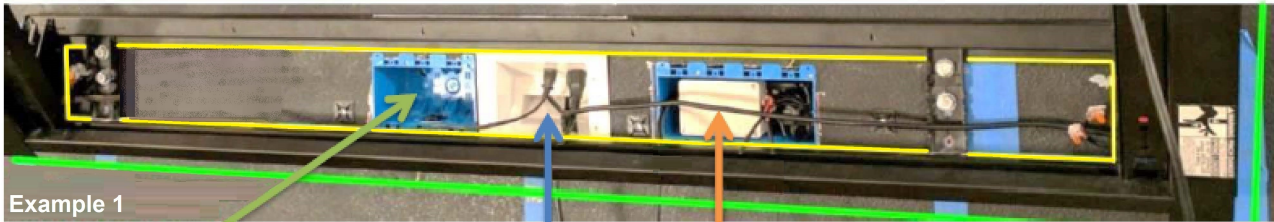

Example 1

If you follow example 1
You'll likely need somewhere to stuff extra cable. Installing a **3-GANG "OLD WORK" box** (shown here) is an easy way to accommodate this.

MOTORIZED models:

Motorized models have a power supply and controller box that must be housed in the wall or close by*. These boxes fit nicely in a **4-GANG "OLD WORK" electrical box** as shown here.

*You can relocate the power supply & controller box to a nearby cabinet or closet if you want. HOWEVER, you must use the appropriate gauge wire to avoid 'Voltage Drop' (reduced power to the motors.)

(2 wires per motor = 4 wires total) Up to 20' extension = 14AWG X 4
Up to 35' extension = 12AWG x 4 Up to 50' extension = 10 AWG x 4


ALL MODELS require a RECESSED Outlet of some kind because the cover plate sits 1/2" from the wall.

Option 1: Power Bridge Two-Pro-12 (found on the **Accessories** page of our website. www.HVTVMounts.com)

Option 2: (shown above) DataComm 45-0071-WH or 45-0024-WH. You can order this item from Amazon by searching the part numbers above. Caution: You can find items that look similar to this at your local hardware store. However, they are likely larger than the example shown above (5" x 7") and may not fit well.

Option 3: Need to pick something up today? You can find the following at your local hardware store. "Duplex RECESSED Outlet," "1-Gang Old Work box," and "Recessed Wall Plate for low voltage cables."

Option 4: (shown below) You can use an in-wall, flush mount, junction box similar to the one shown below. **Caution: Potential interference with picture frame!** As the mount flips around and approaches the TV viewing position, the picture frame will pass closely to the wall/mounting plane. Any Make sure nothing protrudes from the wall ABOVE the YELLOW outlined area. Contact us for more info.

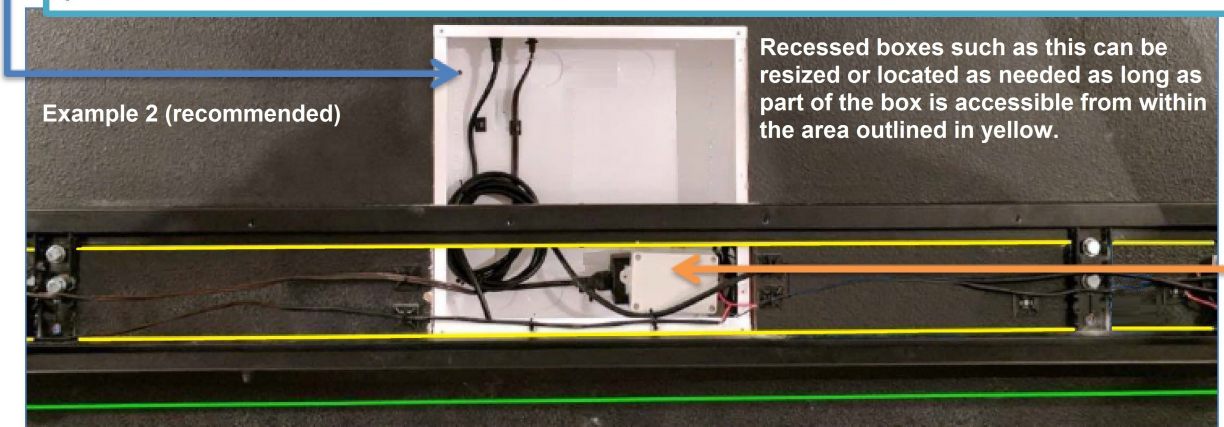

Example 2 (recommended)

Recessed boxes such as this can be resized or located as needed as long as part of the box is accessible from within the area outlined in yellow.

CONTACT
Mark Joseph Design LLC / Hidden
Vision TV Mounts
Mark Beshara 208-919-5969

Electrical

M3-65-8.3_DRAWINGS FOR RECESSED APPLICATION

Drawing #:


Page 9

SCALE: 1:16 DO NOT SCALE DRAWING Date: 6/1/2023

These drawings are offered as a courtesy to be used as a guide. Any changes can have unintended consequences. Please speak with Hidden Vision to go over any changes.

To understand the electrical requirements it is best to start by watching the install video then look over the

How are cables routed from the TV to the wall? You can route up to 3 cables per side. The cables run from the TV, through the arms, and can enter the wall anywhere within the area outlined in yellow below. A cover plate will be

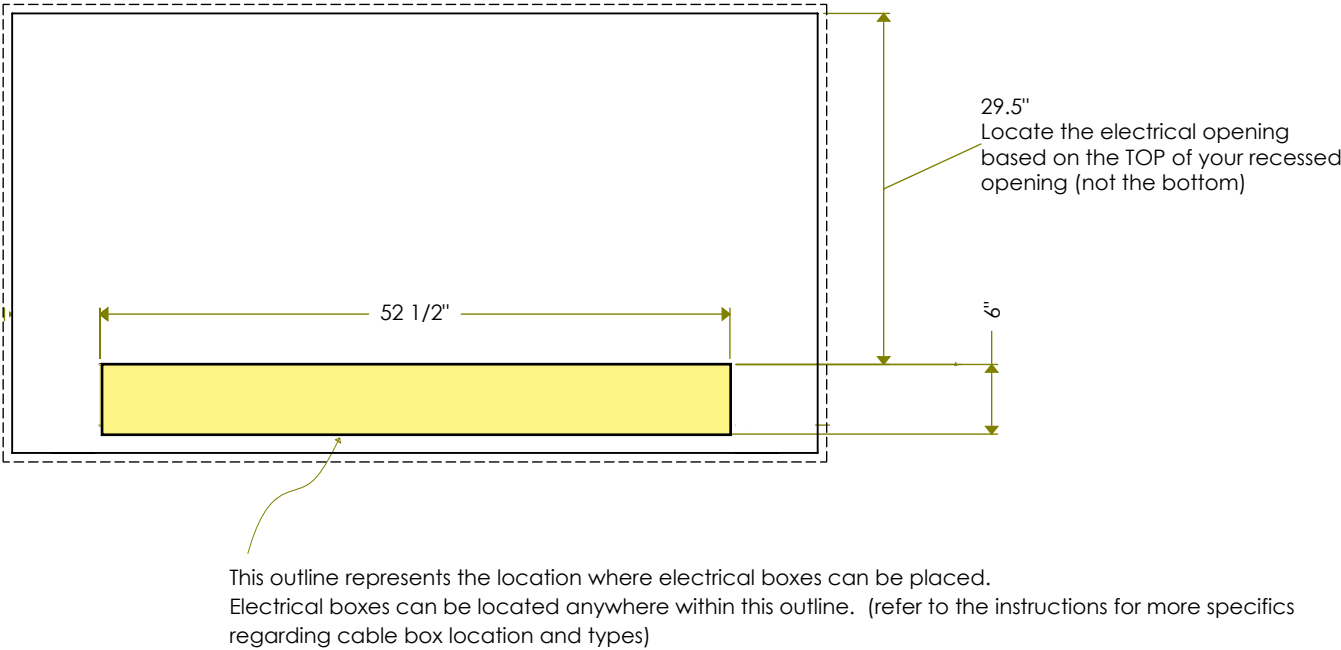

	CONTACT Mark Joseph Design LLC / Hidden Vision TV Mounts	DRAWING NAME: Electrical Location	Drawing #: - Page 10
	Mark Beshara 208-919-5969	FILE NAME: M3-65-8.3_DRAWINGS FOR RECESSED APPLICATION	
		SCALE: 1:16	DO NOT SCALE DRAWING Date: 6/1/2023